

HINGE DOWN BOLLARD

PRODUCT SPECIFICATION

- Hinge down bollards are flexible in use, allowing or restricting access of vehicles, ideally suited for private parking and pedestrian walkways.
- The Hinge down bollard is made from Naturally Very Durable Hardwood, with hinge adaptation, including hasp and staple, all in bead blasted Stainless Steel.
- 1/3 of the Hinge down bollard is below ground level. They project 120mm approx. above ground level, when in the horizontal position.
- Hinge down bollards are finished to a minimum section size of 140 x 95mm.
- Mass concrete foundation to be determined on site by others subject to ground conditions and loading.
- Padlock and key can also be supplied. (Padlock and key alike)
- Fire brigade padlocks are also available.
- All Woodscape bollards are designed and manufactured in-house to meet your specific requirements.
- Available in FSC Certified Hardwood.



scan for the
woodscape
website




Woodscape products are manufactured from Naturally Very Durable Hardwoods, sourced from sustainable forests, as standard. As an FSC® certified supplier we can manufacture our products using FSC certified timber as required.

HINGE DOWN BOLLARD

PRODUCT SPECIFICATION

Technical Data: Typical Square Hinge Down Bollard 1000mm, built-in 400mm below ground.
Please contact Woodscape for standard or bespoke detailed customer drawings.

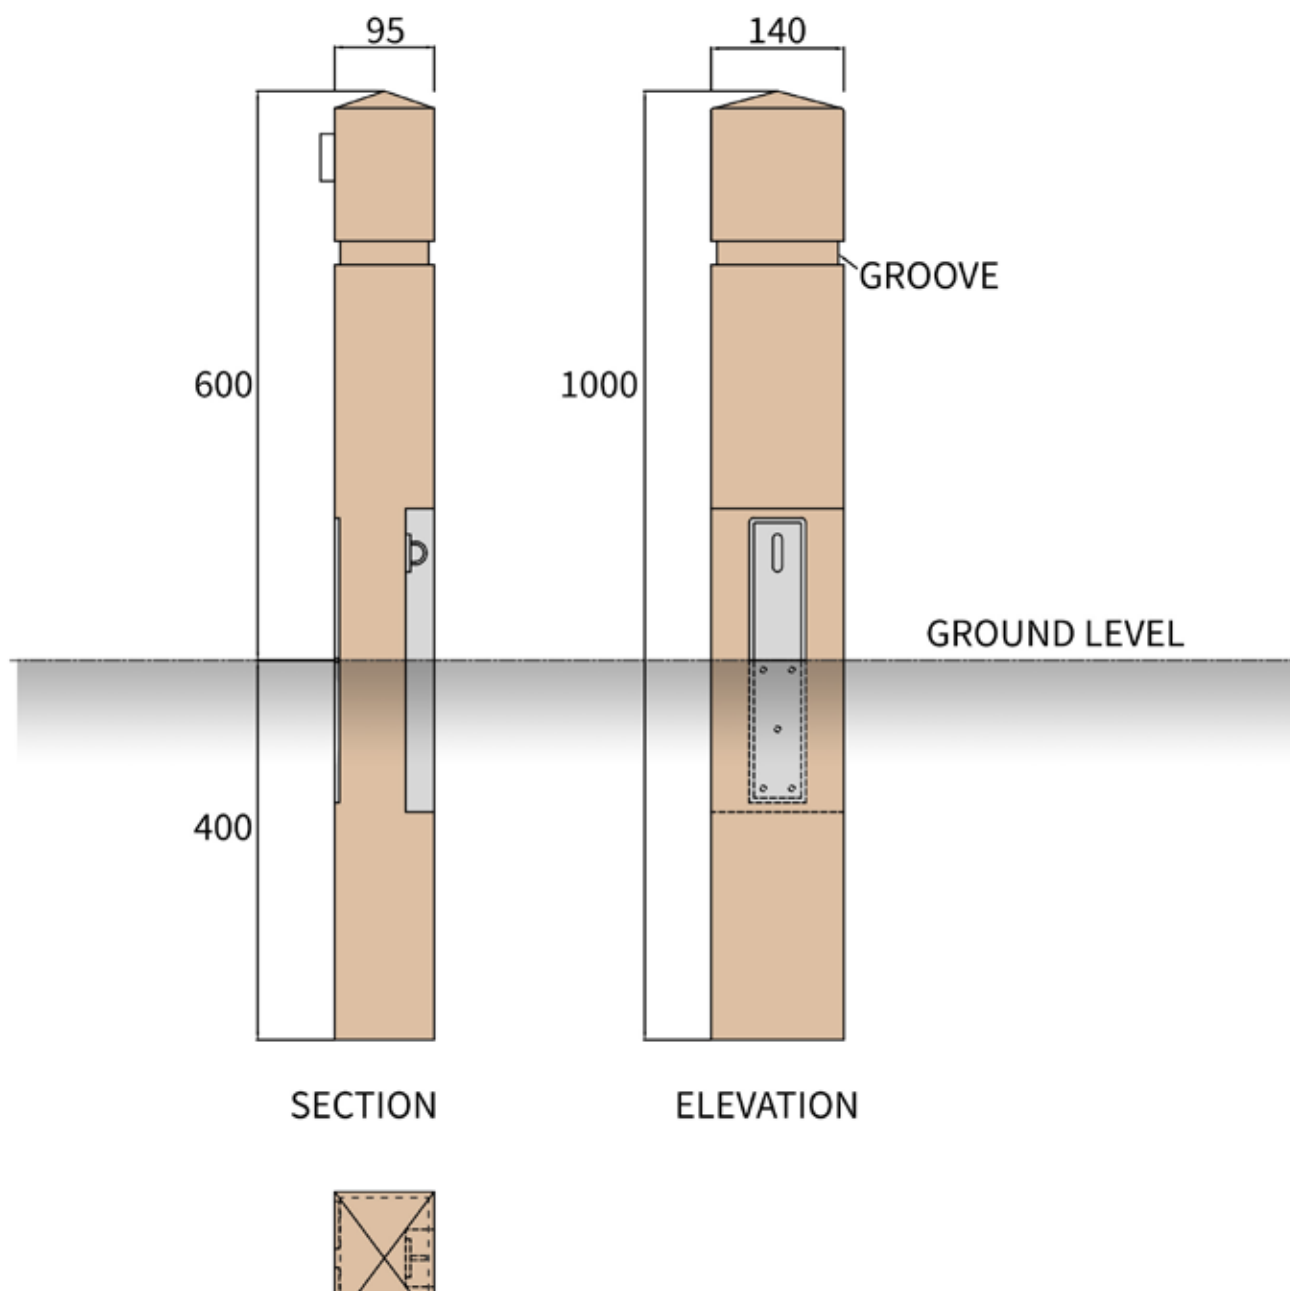

HINGE DOWN BOLLARD

PRODUCT SPECIFICATION

A selection of bollard profiles are available. Custom profiles and sizes are also available upon request.

BOLLARD PROFILES



HINGE DOWN BOLLARD

PRODUCT SPECIFICATION

Bollard customisation include grooves, reflective bands, discs, logos, signs, engraving and wording all in a variety of colours: Red, Blue, Green, Yellow, White, Black.

